



# **SL-T1921SYC020-L190** DATA SHEET

 SPEC. NO.
 :
 SZ20062202

 DATE
 :
 2020/09/16

 REV.
 :
 A/1

Approved By:

Checked By:

Prepared By:

Part No.	SL-T1921SYC020-L190	Page	1 of 9
			LG-QR-R009-01



t No. SL-T1921SYC020-L190

## LIGHT ELECTRONICS CO., LTD.



Part No. SL-T1921SYC020-L190	Page	3 of 9
------------------------------	------	--------



#### Electrical Optical Characteristics at Ta=25℃

Parameter	Parameter Symbol		Min.	Тур.	Max.	Unit	Test Condition				
	Iv	S12	145		185	mcd					
Luminous Intensity		S13	185		240		I <sub>F</sub> =20mA (Note 1)				
		S14	240		310						
Viewing Angle $2_{1/2}$			110		Deg.	(Note 2)					
Peak Emission Wavelength	р			585		nm	I <sub>F</sub> =20mA				
Dominant Wavelength	d	Y1	585		589	nm	nm	nm	nm	nm	$I_F=20mA$ (Note 3)
Dominant Waveleigun	a	Y2	589		593		$I_{\rm F}$ =2011A (1001e 3)				
Spectral Line Half-Width				15		nm	I <sub>F</sub> =20mA				
Forward Voltage	V	V2	1.8		2.1	v	V	V	V	I <sub>F</sub> =20mA	
Forward Voltage	V <sub>F</sub>	V3	2.1		2.4		$1_{\rm F}$ –2011A				
Reverse Current	everse Current I <sub>R</sub>				10	μA	V <sub>R</sub> =5V				

Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity: ±15%.

2.  $_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.


#### 3. The dominant wavelength, d is derived from the CIE chromaticity diagram and represents the

single wavelength which defines the color of the device. Tolerance of Dominant Wavelength:  $\pm 1.0$ nm.

4. Tolerance of Forward Voltage:  $\pm 0.1$ V.

Part No.	SL-T1921SYC020-L190	Page	4 of 9
1 41 0 1 100		- "8"	


## LIGHT

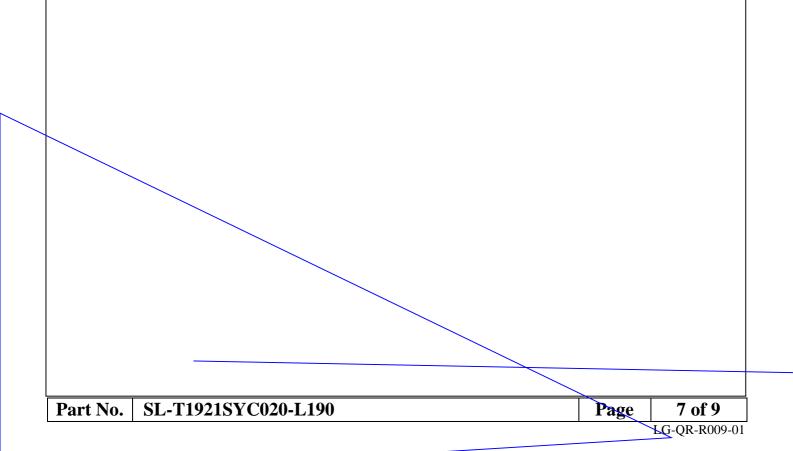

LIGHT	LIGHT	ELECTRONICS CO., LTD.		Ro
Carrier Tape S	pecifications(L	.oaded Quantity: 2000PCS/reel)		
Moisture Resis	stant Packagin	α		
	stant i donagin	9		
	-			
			1	
	14 M			
	Г1921SYC020-I			

т тейт



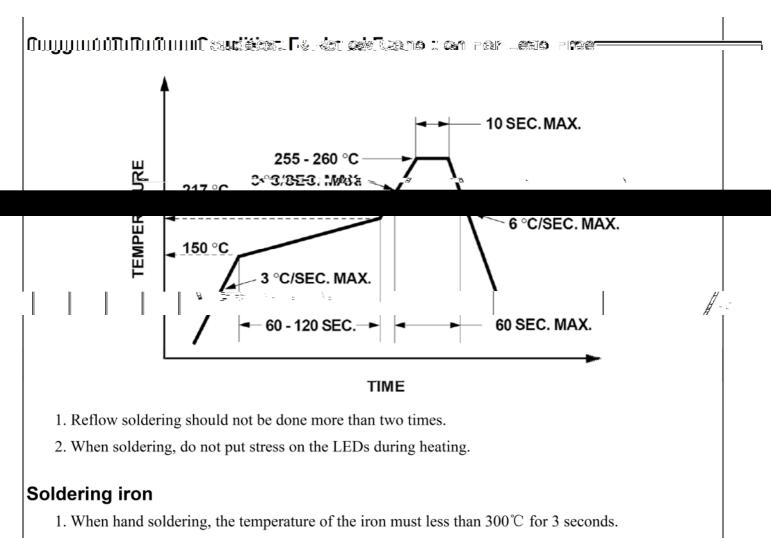

2. The hand solder should be done only once.

### Repairing

\_\_\_\_Renair should not be done after the LEDs have been soldered. When rengiring is unavoidable a

'double-head soldering iron should be used (as befow figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

