

LG-05PD4D94K-5118U

DATA SHEET

SPEC. NO. : SZ21110101
DATE : 2021/11/01
REV. : A/0

Approved By:

Checked By:


Prepared By:

The background is a complex abstract composition of overlapping geometric shapes in white, black, and light gray. A large, faint watermark of a signature is visible in the upper right quadrant. The text is positioned in the upper left area, overlaid on the white and light gray shapes.

**kage Dimo6(ens
atures**







LED MOUNTING METHOD

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming process.

LEAD FORMING PROCEDURES

1. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend (Fig.5 and Fig.6).

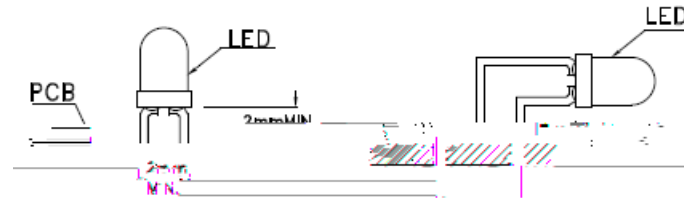


Fig. 6

Fig. 5

2. Lead forming or bending must be performed before soldering, never during or after soldering.
3. Do not stress the LED lens during lead-forming in order to fractures in the lens epoxy and damage the internal structures.
4. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB (Fig.7).
5. Do not bend the leads more than twice(Fig.8)

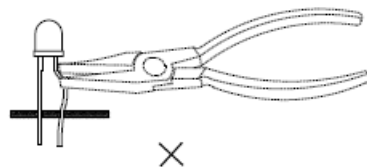


Fig. 7




Fig. 8

6. After soldering or other high-temperature assembly, allow the LED to cool down to 50 before applying force (Fig.9).In general, avoid placing excess force on the LED to avoid damage. For any questions please consult with LIGHT representative for proper handling procedures.

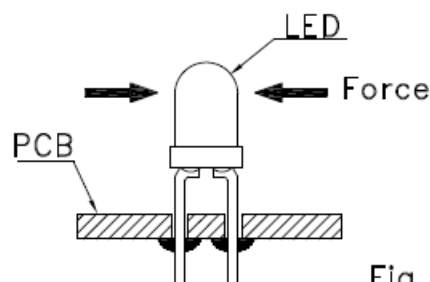


Fig. 9

LIGHT

