



# **SL-T0603GEC005-L40** DATA SHEET

 SPEC. NO.
 :
 SZ18051006

 DATE
 :
 2018/05/10

 REV.
 :
 A/0

Approved By:

Checked By:

Prepared By:

Part No.	SL-T0603GEC005-L40	Page	1 of 8
			LG-QR-R009-01

### LIGHT ELECTRONICS CO., LTD.






### Features

- Pb free product—RoHS compliant
- Low power consumption, High efficiency
- Reliable and rugged
- Long life solid state reliability
- ♦ Viewing Angle: 120°

### **Package Dimension**

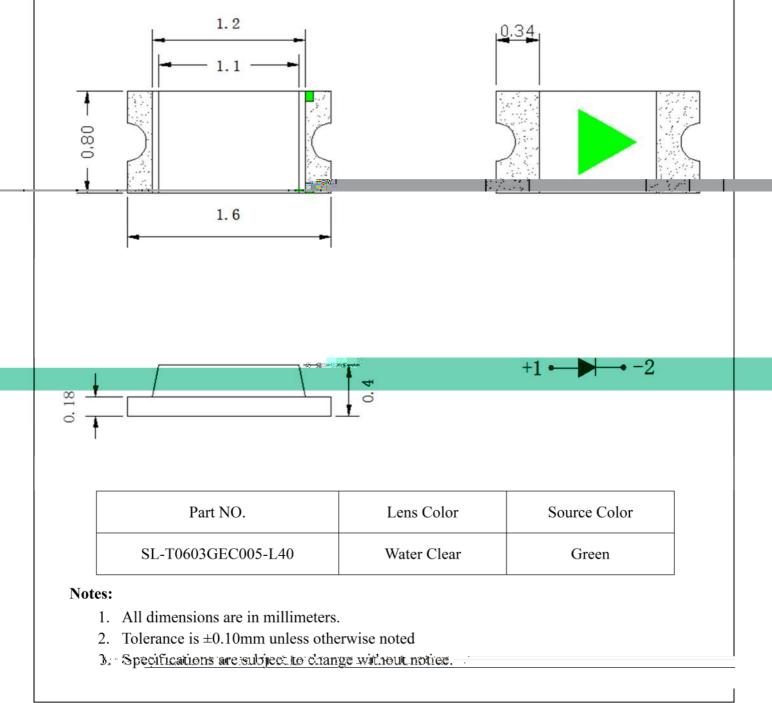



## LIGHT ELECTRONICS CO., LTD.



### Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit	
Power Dissipation	75	mW	
Continuous Forward Current	25	mA	
Peak Forward Current <sup>*2</sup>	60	mA	
Reverse Voltage	5	V	

Part No.	SL-T0603GEC005-L40	Page	<b>3 of 8</b>
			LO OD DOGO OI





#### **Electrical Optical Characteristics at Ta=25**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Luminous Intensity	IV	200		400	mcd	I <sub>F</sub> =5mA (Note 1)
Viewing Angle	<b>2</b> 1/2		120		Deg.	(Note 2)
Dominant Wavelength	d	520		530	nm	I <sub>F</sub> =5mA
Peak Emission Wavelength	р		515		nm	I <sub>F</sub> =5mA
Spectral Line Half-Width			30		nm	
Forward Voltage	$\mathbf{V}_{\mathrm{F}}$	2.4		3.2	V	I <sub>F</sub> =5mA (Note 4)
Reverse Current	I <sub>R</sub>			10	μΑ	V <sub>R</sub> =5V

#### Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity:  $\pm 15\%$ .

2.  $_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

3. The dominant wavelength, d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device. Tolerance of Dominant Wavelength:  $\pm 1.0$ nm.

4. Tolerance of Forward Voltage:  $\pm 0.1$ V.

Part No.	SL-T0603GEC005-L40	Page	4 of 8
		8-	











# **LIGHT** LIGHT ELECTRONICS CO., LTD. Label Explanation LIGHT LIGHT RoHS Light Electronics CO., LTD. Light Electronics CO., LTD. LOT ND q MODEL NAME: MODEL NAME: g QUANTI TY: \_\_\_\_\_ QUANTI TY: \_\_\_\_\_ = BI N: \_\_\_\_\_ BI N: \_\_\_\_ PACKI NG DATE: \_\_\_\_ PACKI NG DATE: REMARKS: CUSTOMER P/Nt \_\_\_\_ **Reel Dimensions Note:** Tolerance unless mentioned is $\pm 0.2$ mm; Unit = mm





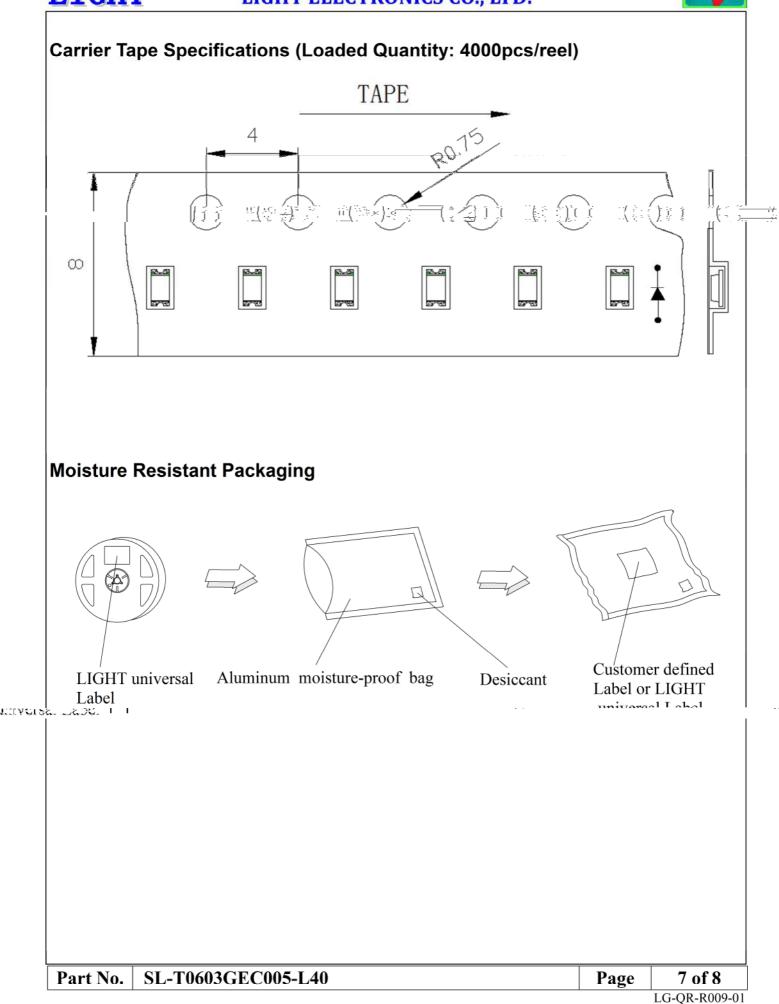

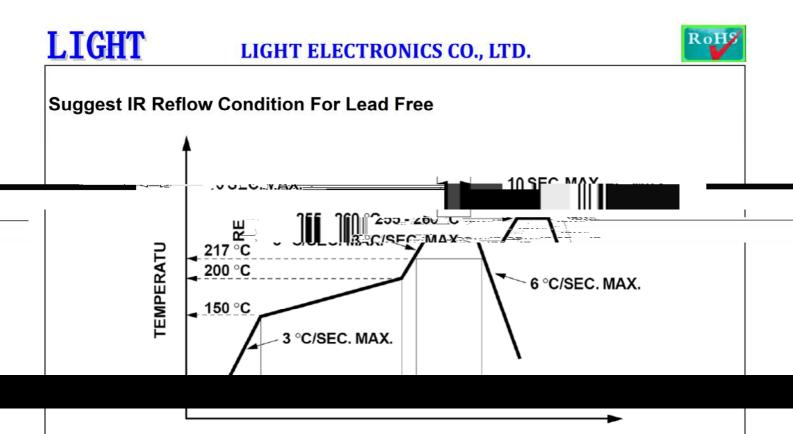

#### TIME

- 1. Reflow soldering should not be done more than two times.
- 2. When soldering, do not put stress on the LEDs during heating.

#### Soldering iron

- 1. When hand soldering, the temperature of the iron must less than  $300^{\circ}$ C for 3 seconds.
- 2. The hand solder should be done only once.

#### Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

