




Features

Package Dimension

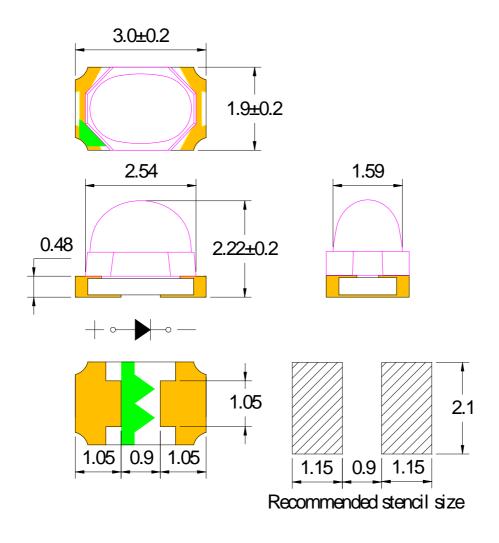

Notes:


Part No.	SL-T3020IRC050-L222-C-S	Page	2 of 9
----------	-------------------------	------	--------




LIGHT ELECTRONICS CO., LTD.



solute Maximum Ratings at Ta=25	1	
1. Storage and operating:		
2. Peak Forward Current:3. Caution in ESD:		
ort No. SL-T3020IRC050-L222-C-S		3 of 9

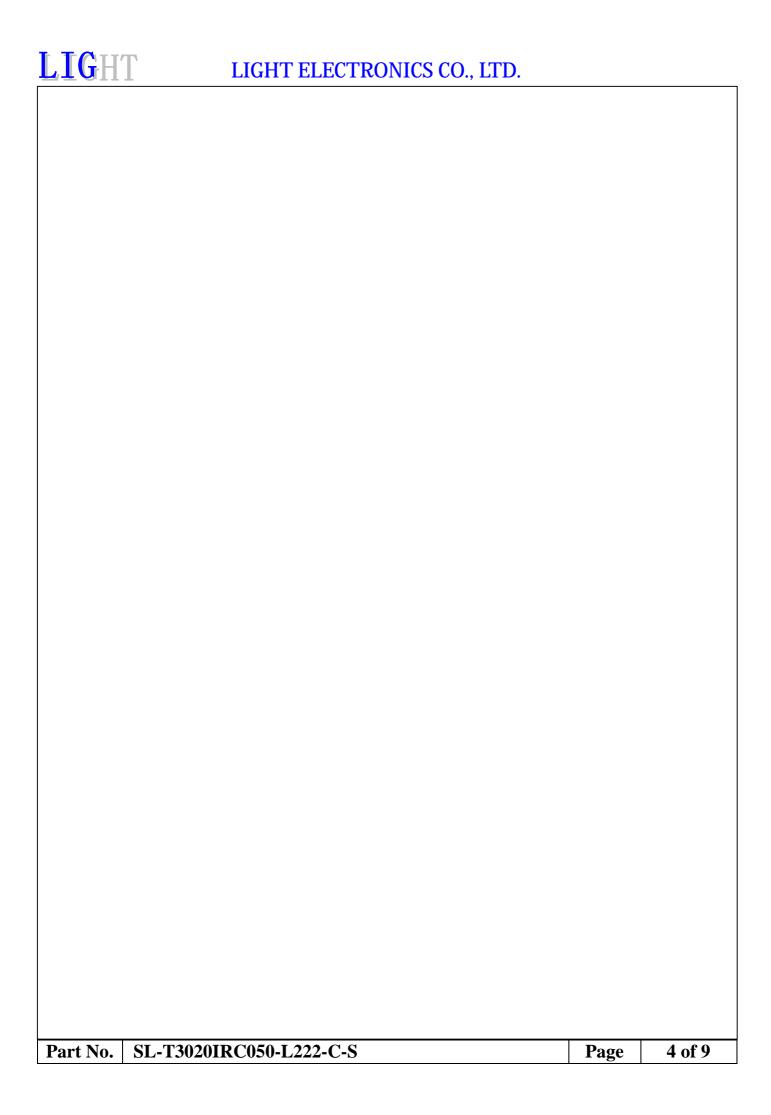

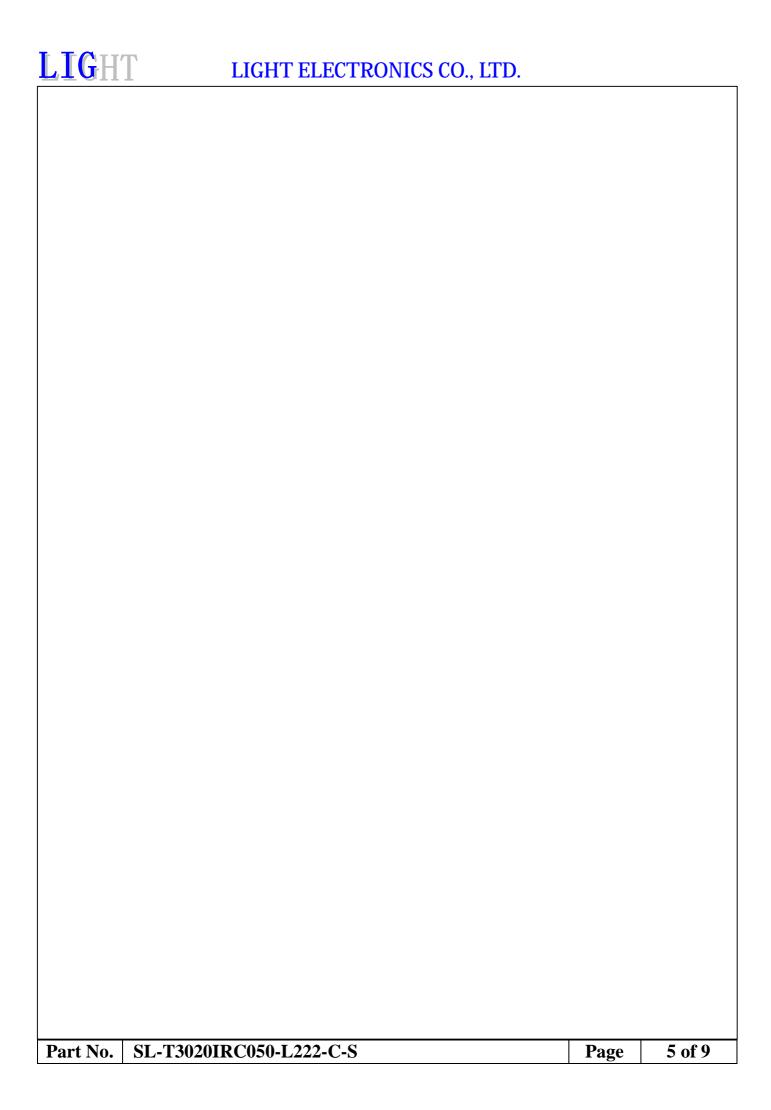

L	LIGHT ELECTRONICS CO., LTD.		
Part No.	SL-T3020IRC050-L222-C-S	Page	6 of 9


,			
	_		

SL-T3020IR Page 8 of 9			
	. SL-T3020IR	Page	8 of 9






Suggest IR Reflow Condition For Lead Free

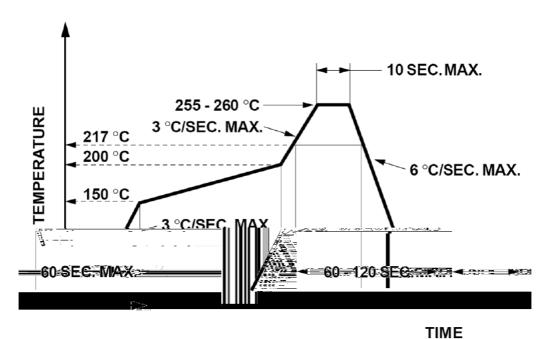

Soldering iron

 $^{\circ}$ C

Repairing

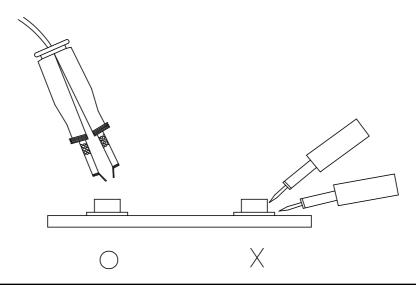

Part No. | SL-T3020IRC050-L222-C-S | Page | 9 of 9