


G

LIGHT ELECTRONICS CO., LTD.

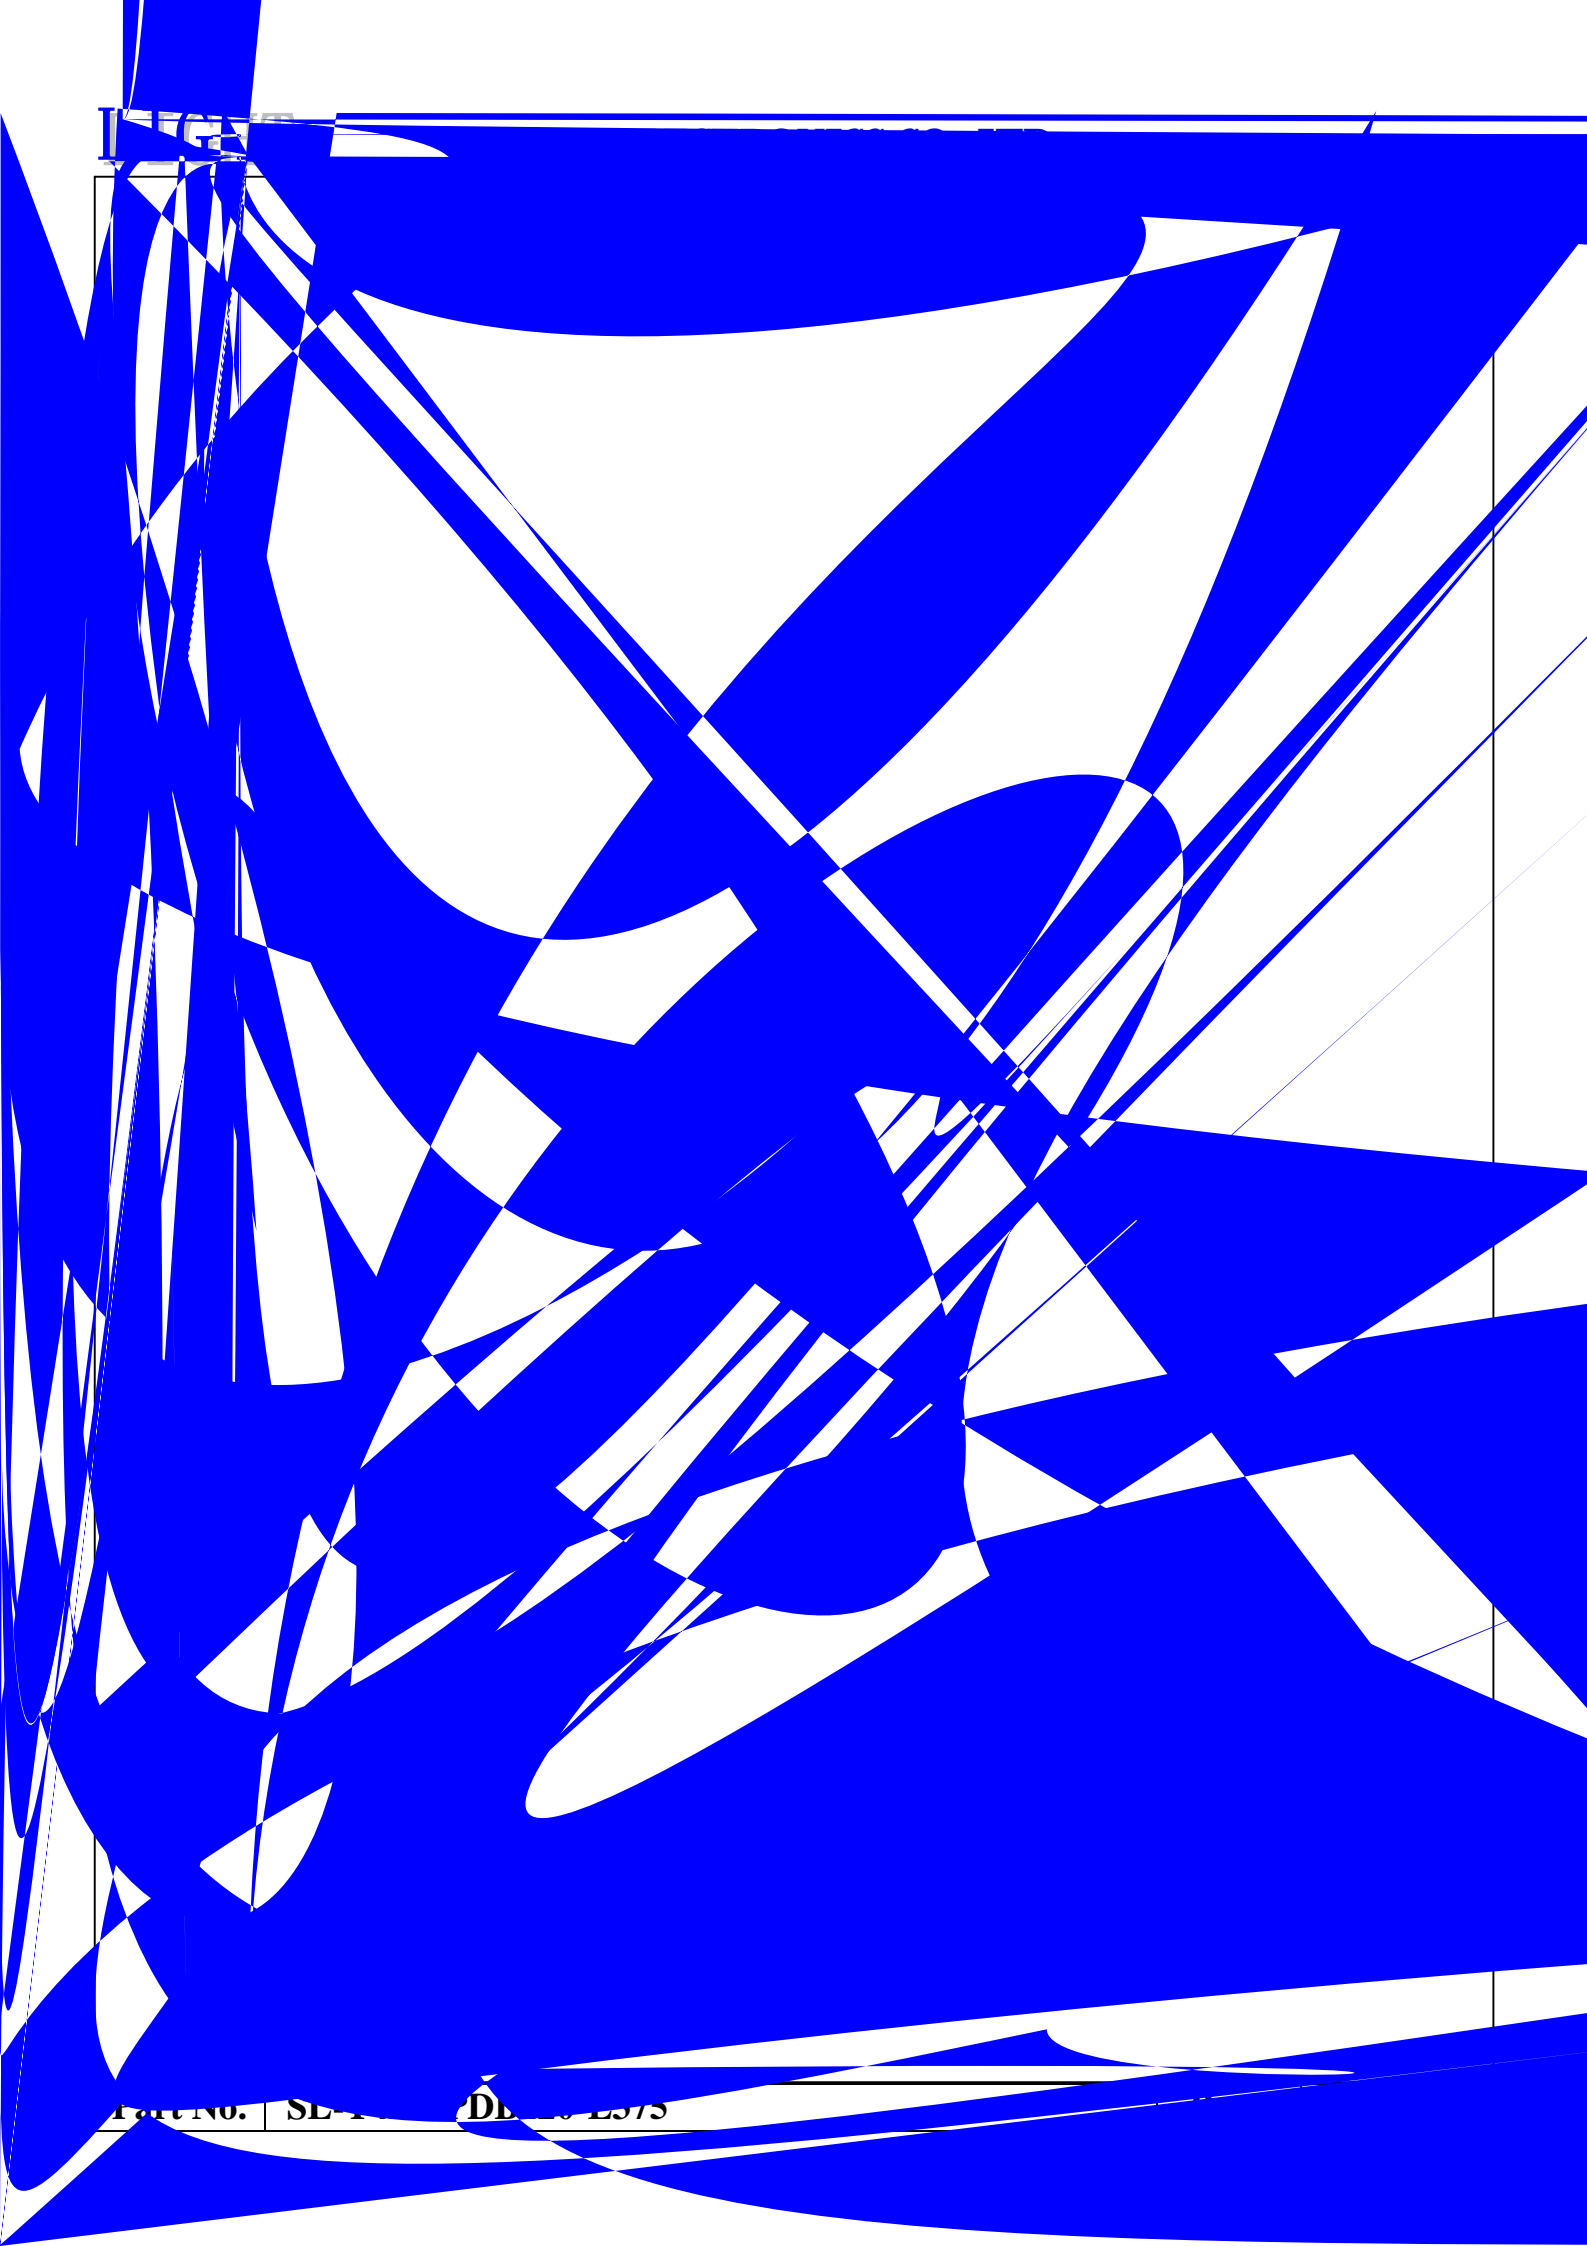

Infrared Photo Diode Specification

Commodity: Infrared Photo diode

Reverse Light Current Bin Limits

BIN CODE	Min.(μ A)	Max.(μ A)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Explanation

LIGHT Universal Label

- * () 5
\$ i 9 g f l + k 6 x 3 ? L ¢ .
/ L J K W (O H F W U R Q L F V & 2 / 7 '


0 2 ' (/ 1 \$. 0 (

4 8 \$ 1 7 , 7 <


% , 1

3 \$ & . , 1 * ' \$ 7 (

5 (0 \$ 5 . 6

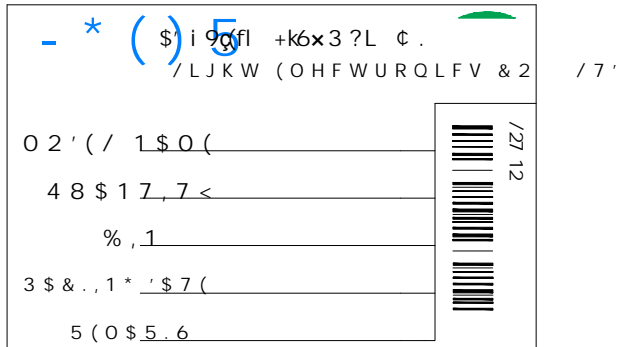

Customer Defined Label




Ÿ ÷ ` -

f H

1 4 Ÿ

; > ß U

Ø m ~ -



Carrier Tape Specifications (Loaded Quantity: 2200pcs/reel)

Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$; Unit = mm

Moisture Resistant Packaging

