



Features


Package Dimension

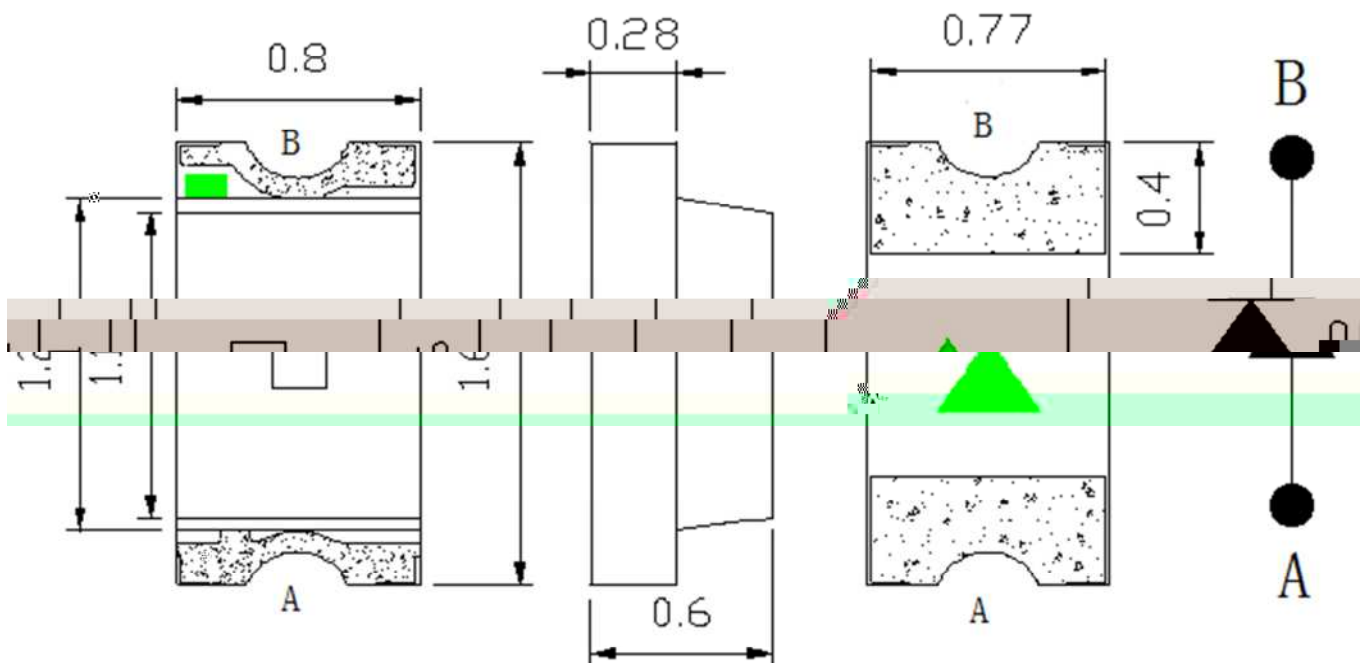


Notes:

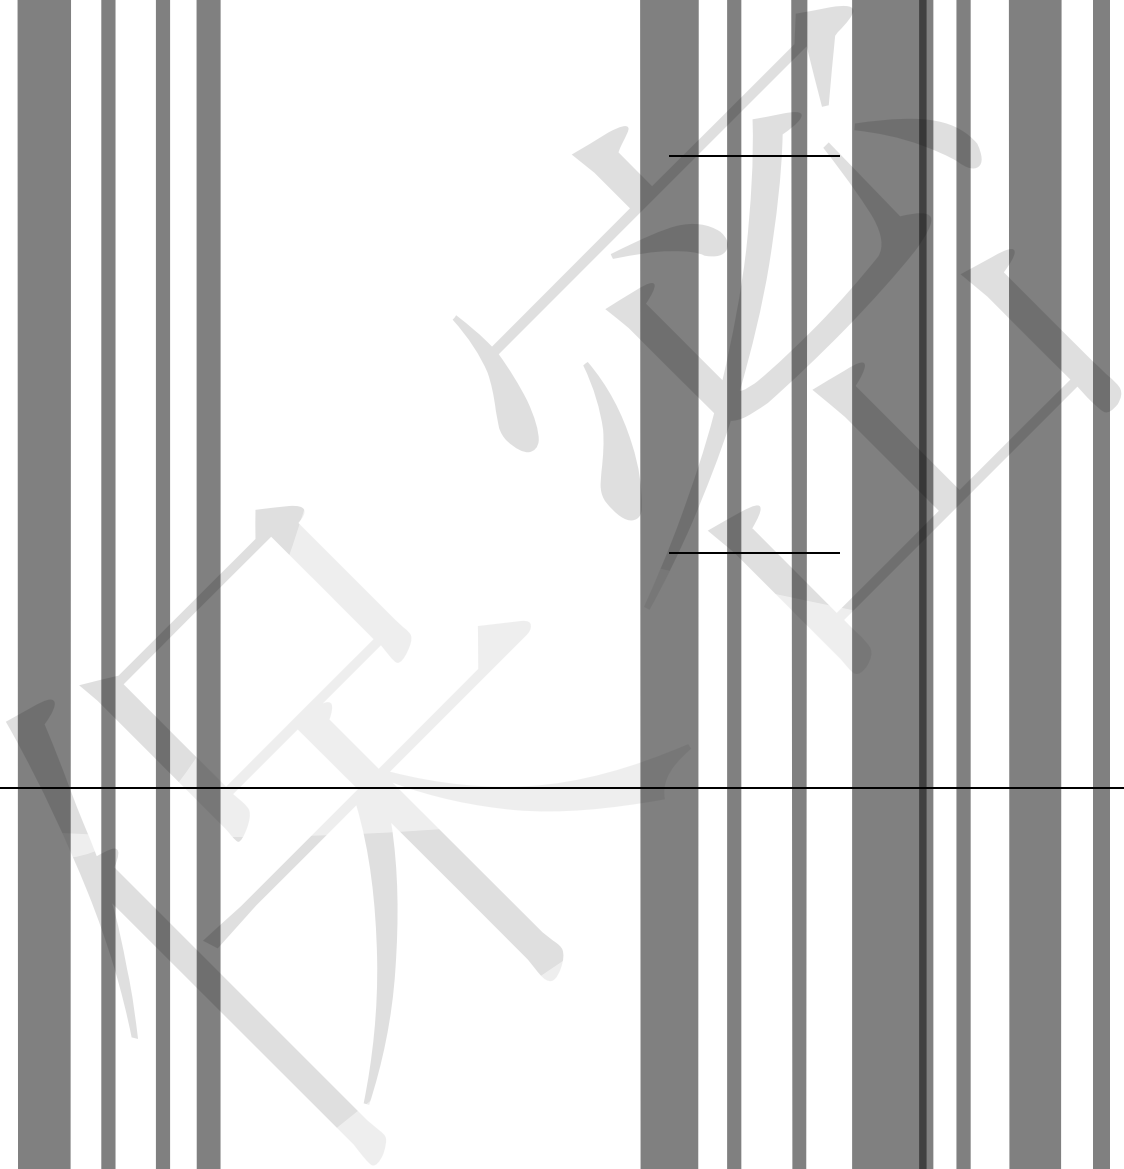


,um331



Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

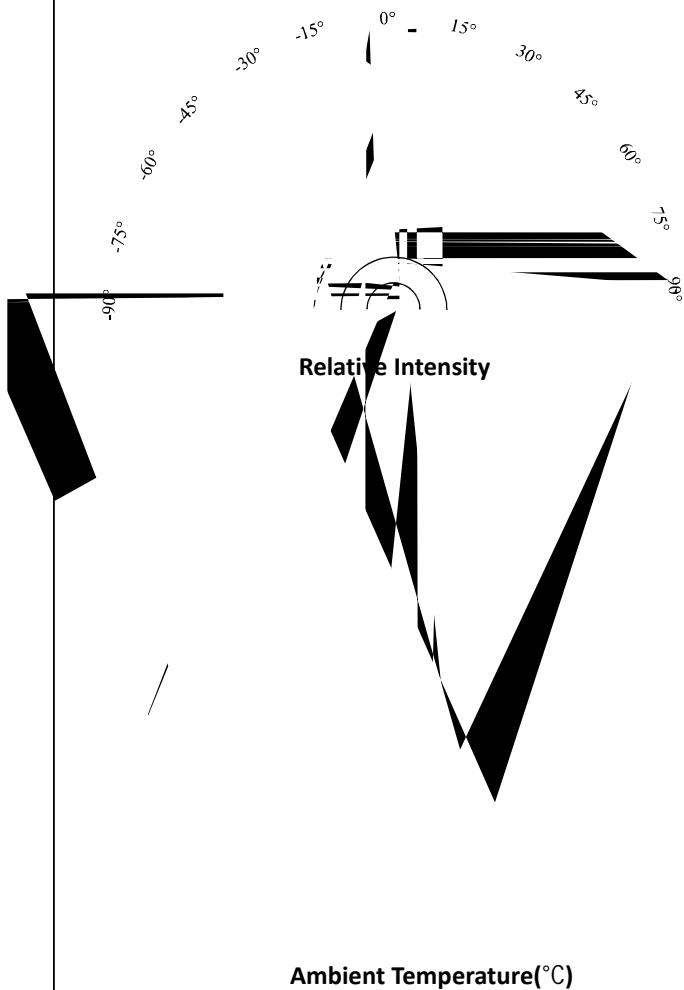


Chromaticity Coordinates (Ta=25°C, IF=20mA)

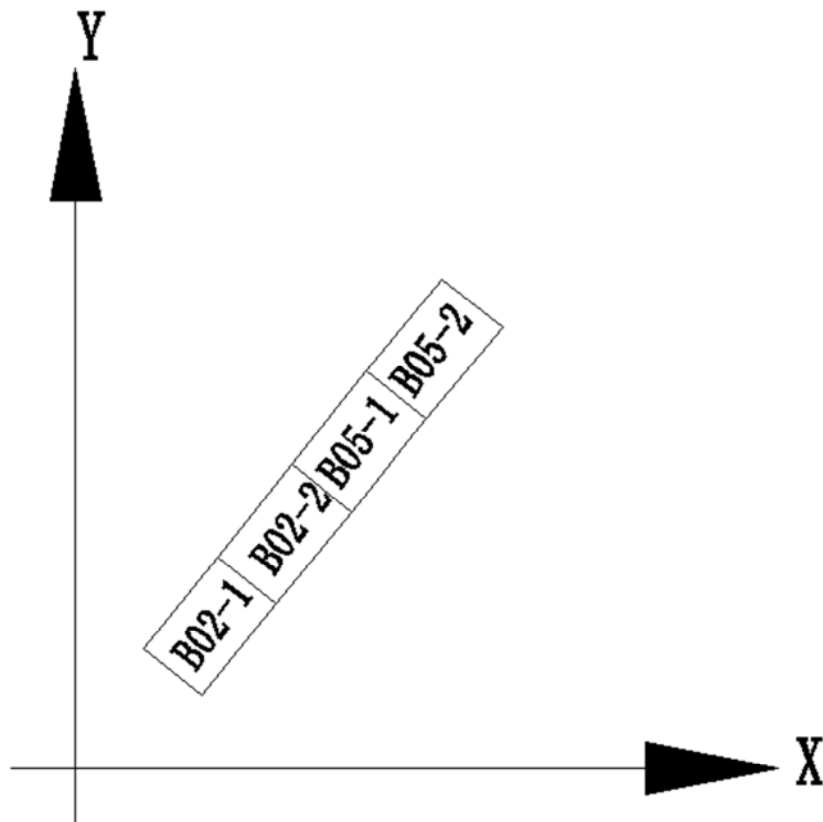


色区 色区	X1	Y1	X2 坐标	Y2	X3	Y3	X4	Y4
B02-1	0.2716	0.2542	0.2672	0.2564	0.2713	0.2650	0.2759	0.2628
B02-2	0.2759	0.2628	0.2713	0.2650	0.2753	0.2732	0.2800	0.2710
B05-1	0.2800	0.2710	0.2753	0.2732	0.2793	0.2841	0.2843	0.2790
B05-2	0.2840	0.2792	0.2793	0.2815	0.2832	0.2898	0.2881	0.2874


Carrier Tape Specifications (Loaded Quantity: 4000pcs/reel)

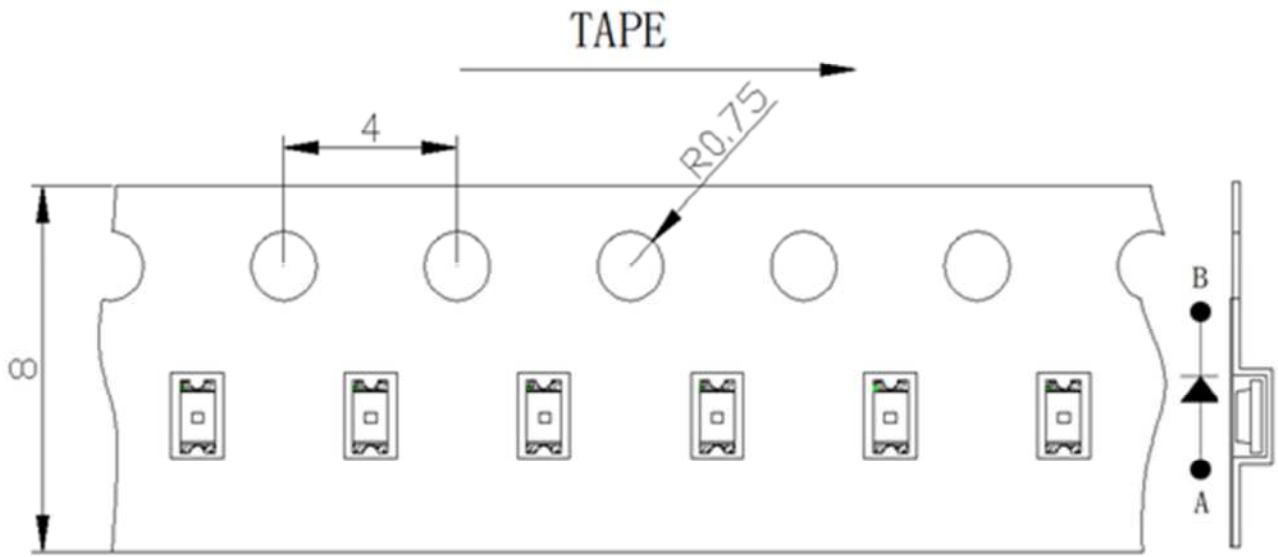

Moisture Resistant Packaging

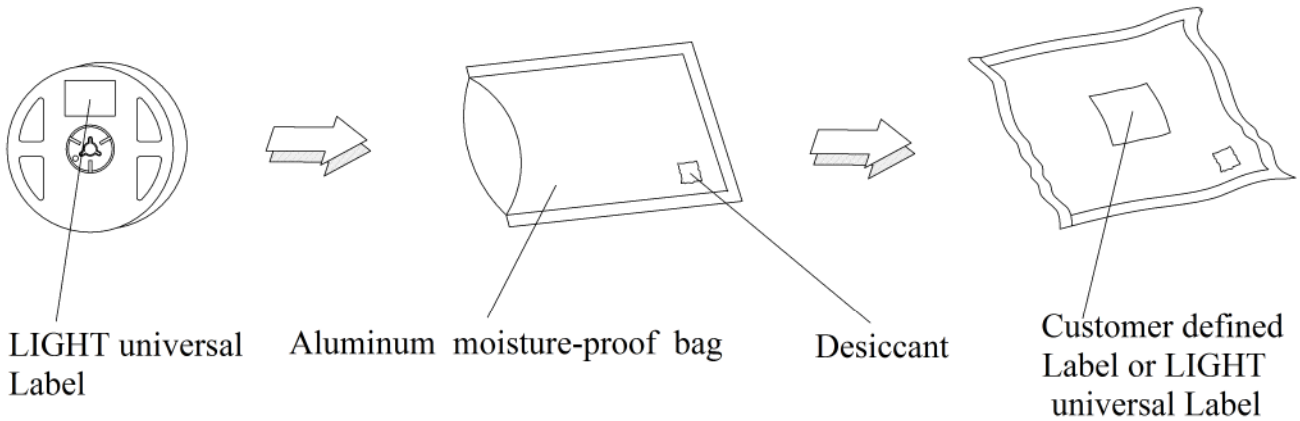

Suggest IR Reflow C

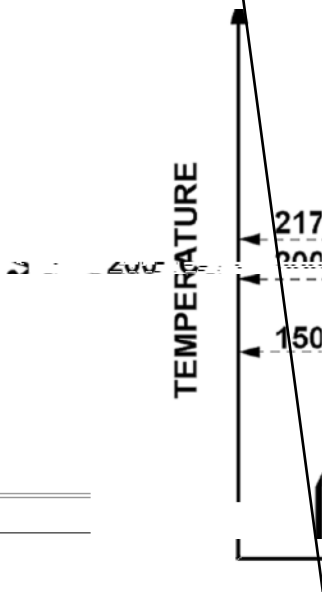

1. Reflow soldering sho
2. When soldering, do n


Soldering iron

1. When hand soldering
2. The hand solder shou

Repairing

Repair should not be do double-head soldering i whether the characterist

r Lead Free

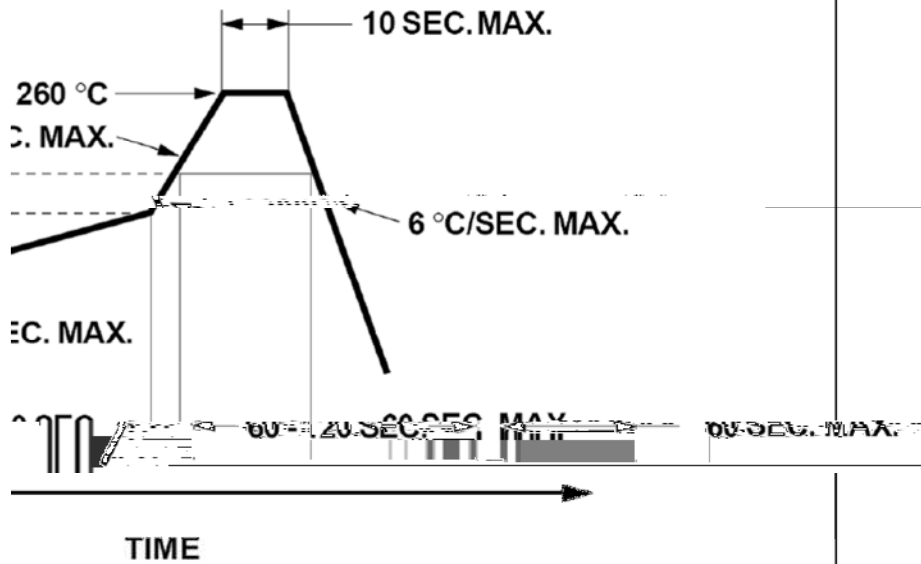

more than two times. the LEDs during heating.

e of the iron must less than 300°C for 3 seconds. once.

ds have been soldered. When repairing is unavoidable, a ed (as below figure). It should be confirmed beforehand l or will not be damaged by repairing.