

SL-T1615IRGRC020-L60

DATA SHEET

SPEC. NO. : SZ22110501
DATE : 2022/11/05
REV. : A/0


Approved By:

Checked By:


Prepared By:

L

LIGHT ELECTRONICS CO., LTD.






Part No.	SL-T1615IRGRC020-L60	Page	3 of 10
-----------------	-----------------------------	-------------	----------------

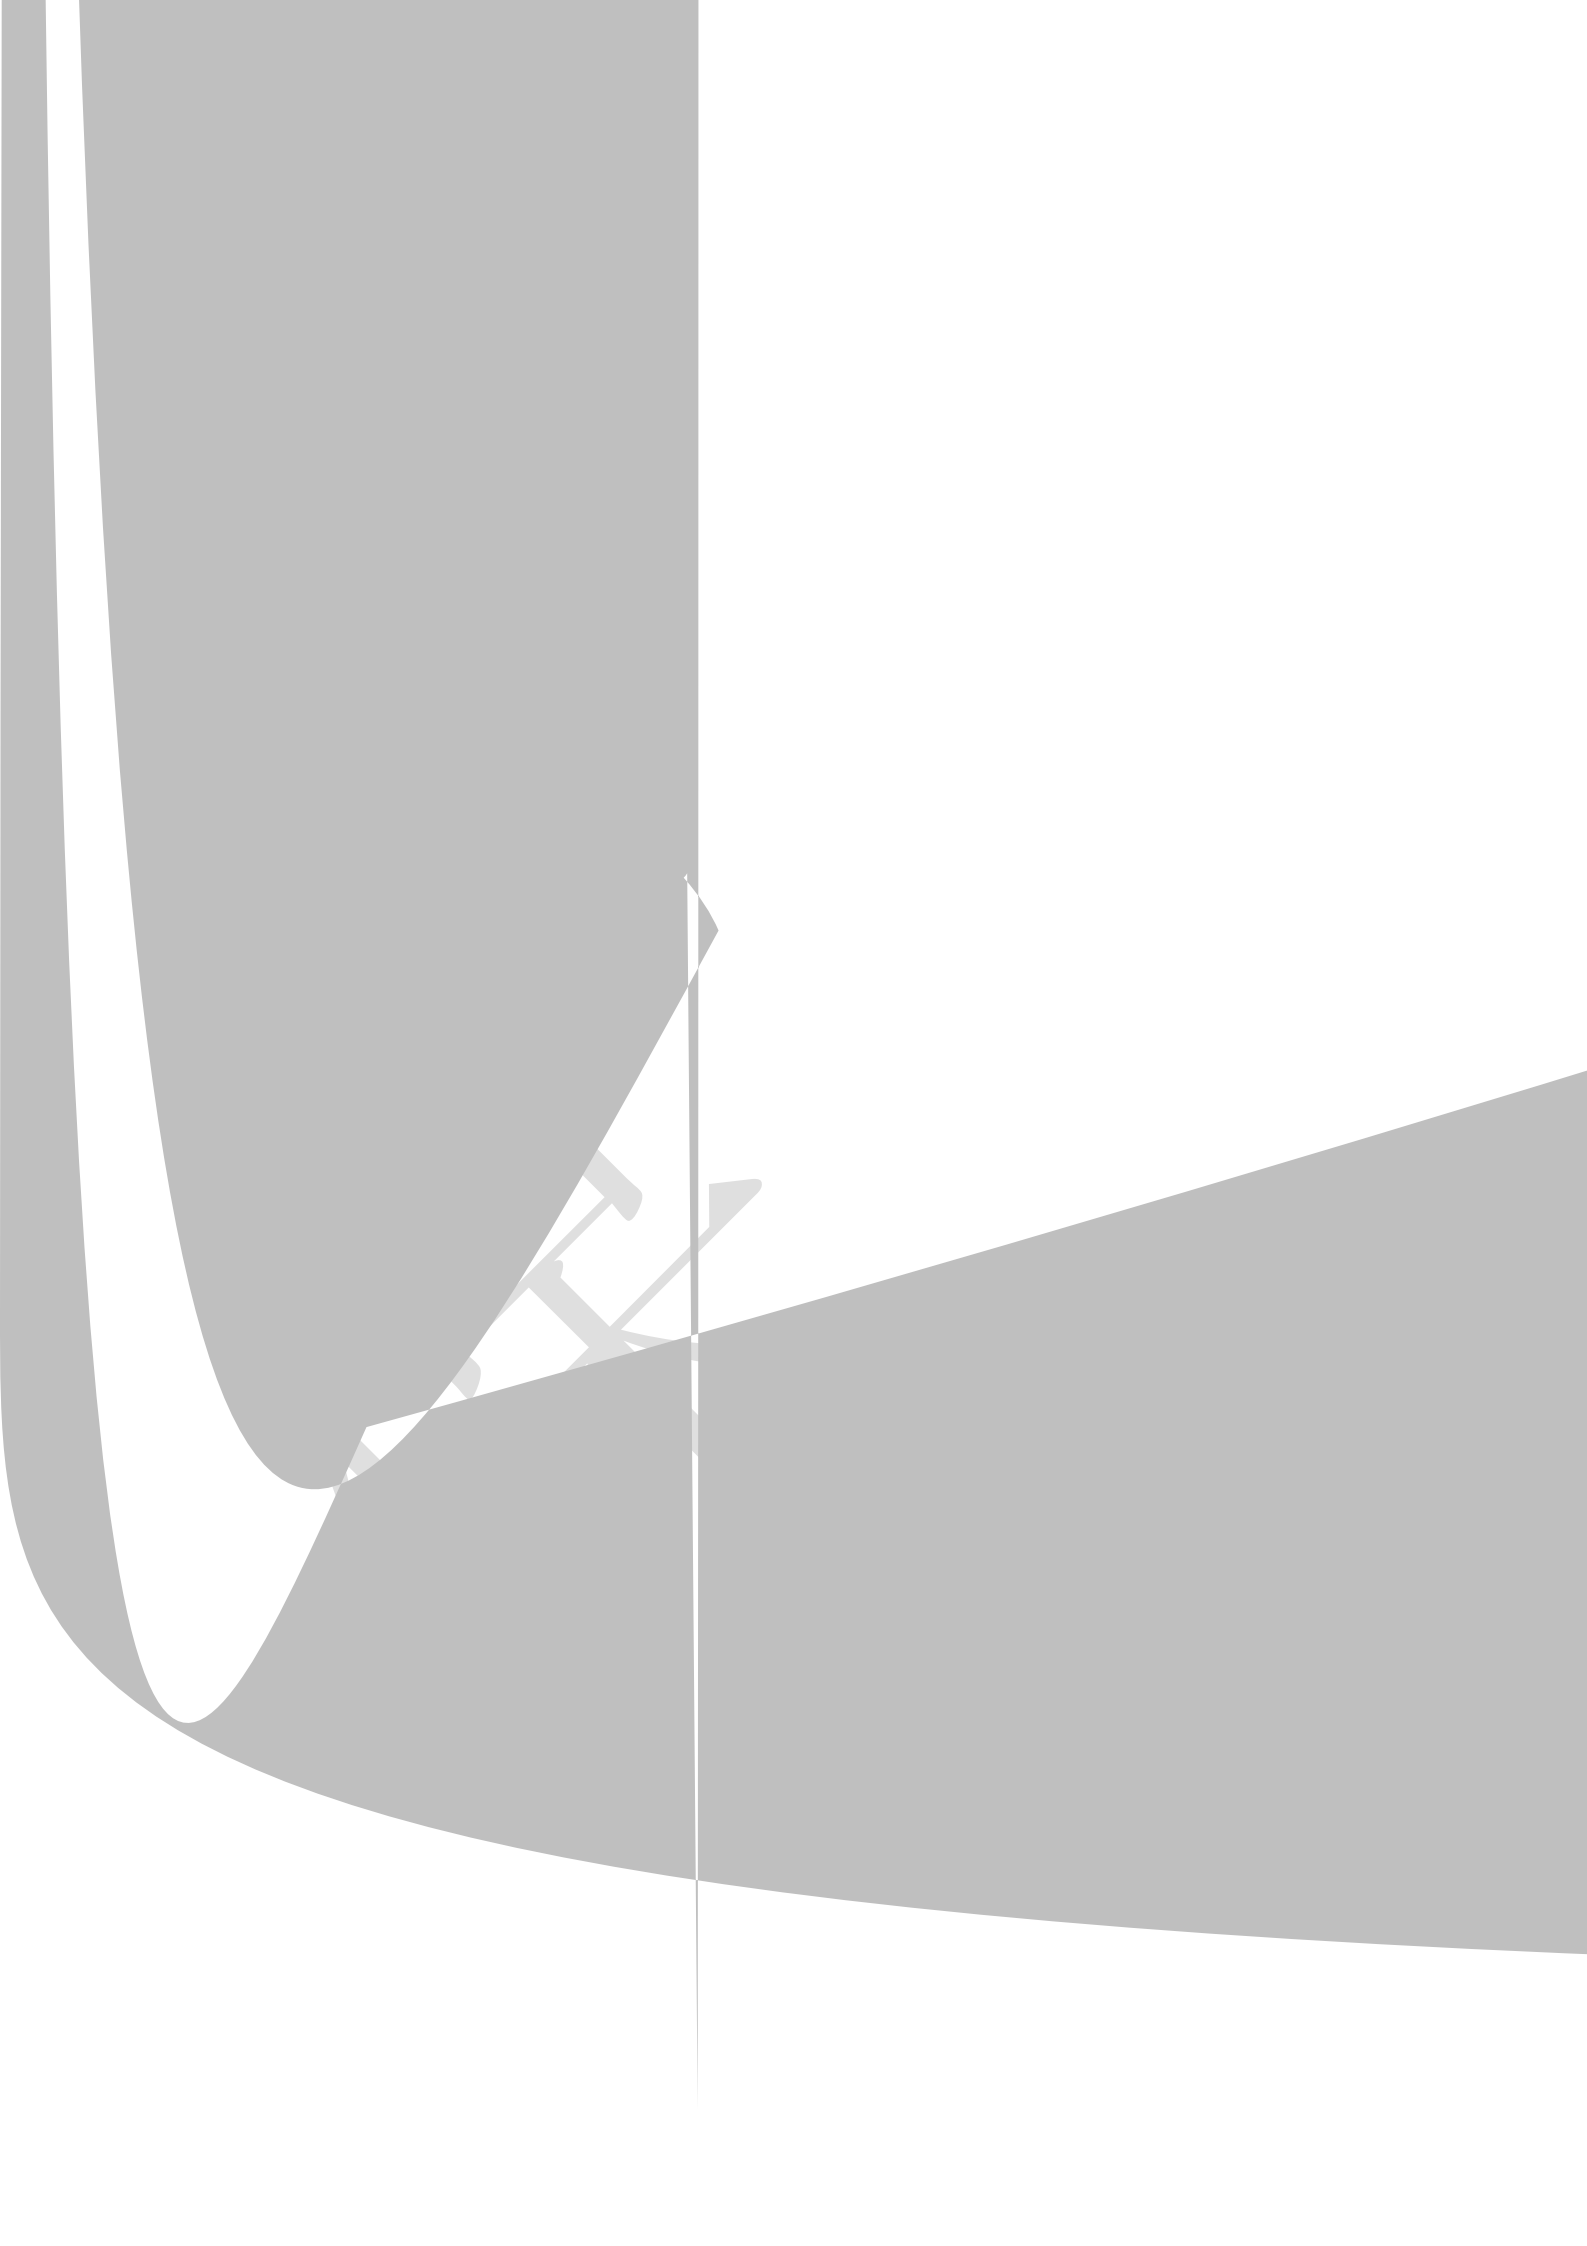




Typical Electrical / Optical Characteristics Curves for Red (25°C Ambient Temperature Unless Otherwise Noted)

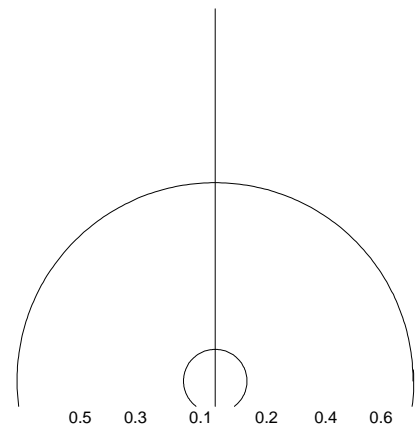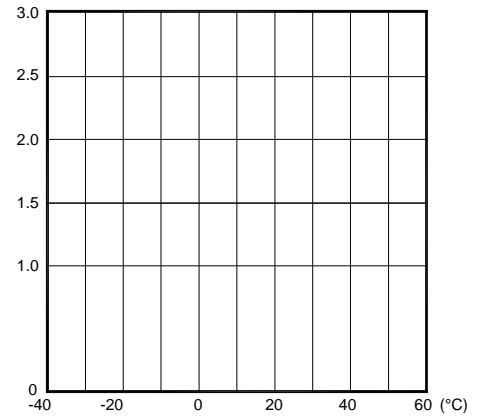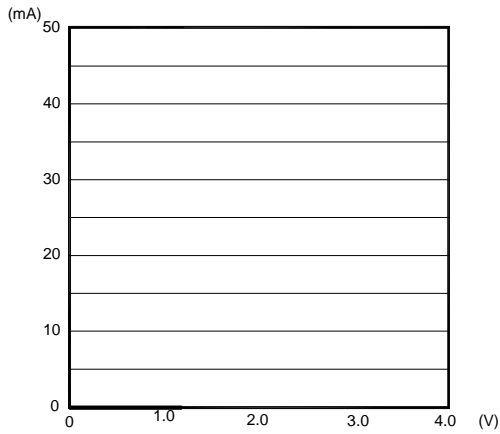

Carrier Tape Specifications

Moisture Resistant Packaging

Suggest IR Reflow Condition For Lead Free

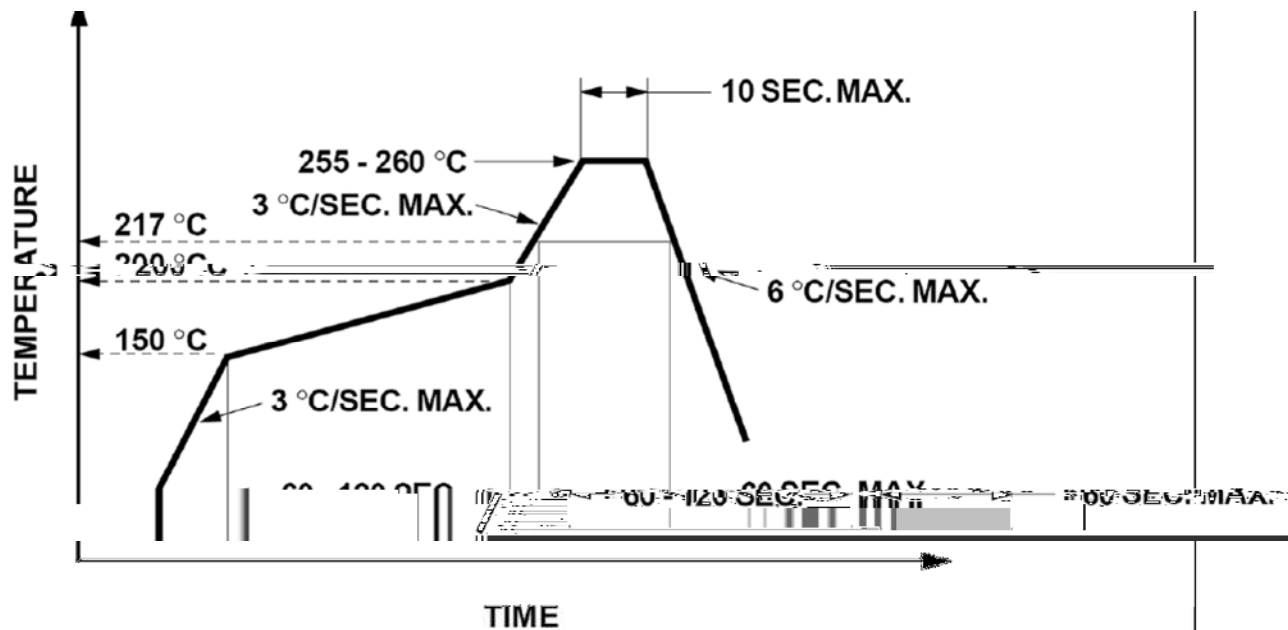

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

Soldering iron

1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
2. The hand solder should be done only once.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

